

Datendosen USB | VGA | RCA

Beschreibung



Schaltgeräte **MEC Q45**
Ref.-Nr. 45437 S - Datendose USB – 1 Modul
Zur Datenübertragung über USB-Anschluss
Ref.-Nr. 45430 S - VGA-Buchse - 2 Module
Videodatenübertragungsbuchse zwischen einem beliebigen Sender (Computer, DVD usw.) und einem Endgerät (TV, LCD, Videoprojektor usw.)
Ref.-Nr. 45580 S - RCA-Dose / Stereo / Video - 1 Modul
Audio- und Videodatenübertragungsbuchse zwischen einem beliebigen Sender (Computer, DVD usw.) und einem Endgerät (TV, LCD, Videoprojektor usw.)
Ausführungen - **QUADRA | SIZA | LATINA**

Erhältlich in den Farben von LOGUS 90, APOLO 5000 und SIRIUS 70


Eigenschaften

Schaltgeräte aus widerstandsfähigem, thermoplastischem Material, nicht leitend.


Referenz	45437 S	45430 S	45580 S
Verbindung	Schraube		
Max. Abstand zwischen den HDMI-Buchsen	5 Meter	15 Meter	20 Meter
Maximale Geschwindigkeit:	12 Mbit/s	nicht zutreffend	

Maße (mm)


Ref.-NR. 45437 S

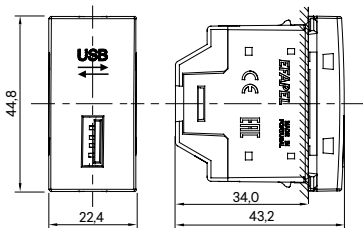


Ref.-NR. 45430 S

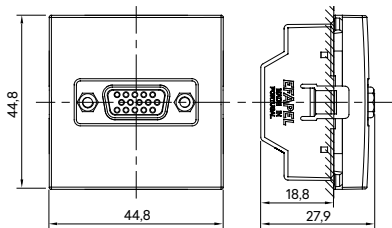


Ref.-NR. 45580 S



Anschlusspläne



Pin	
+	VBUS 5VDC
-	GROUND
D+	DATA +
D-	DATA -



Pin	
1	RED COAX
2	GREEN COAX
3	BLUE COAX
4	ORANGE (ID BIT 2 - NC)
5	RED (GND)
6	RED BRAID
7	GREEN BRAID
8	BLUE BRAID
9	WHITE (KEY)
10	BLUE (GND)
11	BROWN (ID BIT 0 - GND)
12	YELLOW (ID BIT 1 - SDA)
13	GREY (HORIZONTAL SYNCHRONIZATION)
14	GREEN (VERTICAL SYNCHRONIZATION)
15	BLACK (ID BIT 3 - SCL)
16	SHIELD (GROUND)



Pin	
V	VIDEO CABLE
R	RIGHT AUDIO SIGNALS
L	LEFT AUDIO SIGNALS
GND	GROUND