

Loudspeakers

Description




Ref. 75141 | 75142 - Loudspeaker of 2"
Ref. 75131 | 75132 - Loudspeaker of 3"
Ref. 75121 | 75122 - Loudspeaker of 5"
Ref. 75104 C | 75122 C - Surface Mounting Flat 2-Way Loudspeaker of 5"

Their function is to receive the audio signal from the Sound Control Units and transform it into vibrations that are transmitted to the environment, originating sound.

Characteristics


Reference	75141	75142	75131	75132	75121	75122	75104 C	75105 C
Size (Inches)	2"		3"		5"		5"	
Installation	Flush Mounting						Surface Mounting	
Cover Grill	-	-	Round - 75138 T Square - 75139 T		Round - 75128 T Square - 75129 T		-	
Impédance	8 Ohm	16 Ohm	8 Ohm	16 Ohm	8 Ohm	16 Ohm	8 Ohm	16 Ohm
Frequency response	450 - 5000 Hz		130 - 20000 Hz		75 - 20000 Hz		80 - 19000 Hz	
Maximum power	10 W		30 W		50 W		40 W	
RMS	-		20 W		35 W		25 W	

Dimensions - 75141 | 75142 (mm)

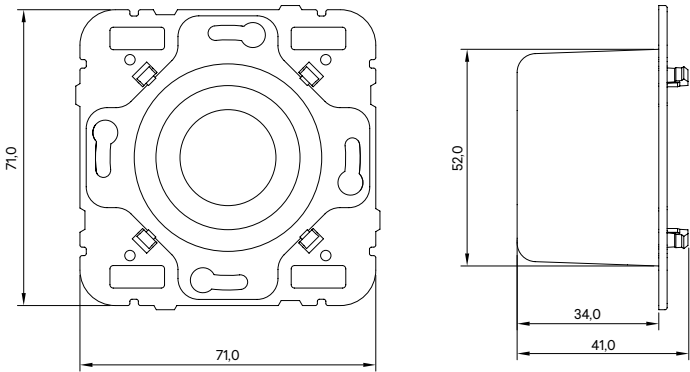


Loudspeakers

Dimensions - 75131 | 75132 (mm)

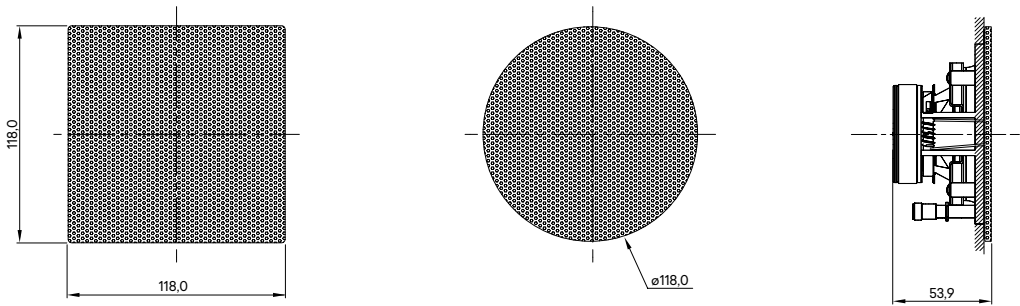

100,0 hole

Dimensions - 75121 | 75122 (mm)

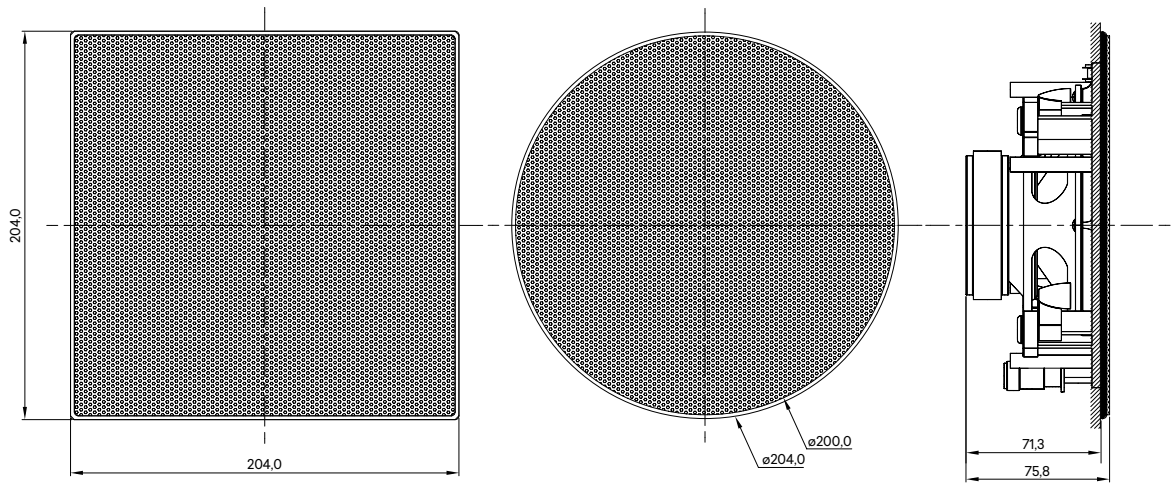

180,0 hole

Dimensions - 75104 C | 75105 C (mm)

