

USB Chargers

Description



MEC 21 Mechanisms

Ref. 21381 - USB Double Charger Type A + Type C
Ref. 21382 - USB Double Charger Type C
Ref. 21384 - USB Double Charger Type A with Output 20°
Ref. 21398 - USB Charger Type C Power Delivery
 Finishings - **LOGUS 90** | **APOLO 5000** | **SIRIUS 70**

MEC Q45 Mechanisms

Ref. 45381 S - USB Double Charger Type A + Type C
Ref. 45382 S - USB Double Charger Type C
Ref. 45383 S - USB Charger Type A
Ref. 45384 S - USB Double Charger Type A with Output 20°
Ref. 45387 S - USB Charger Type C
Ref. 45398 S - USB Charger Type C Power Delivery
Ref. 45439 S - USB Double Charger Type A
 Finishings - **QUADRA** | **SIZA** | **LATINA**

100-240 V ~
50-60 Hz

Allows you to power / charge loads powered via USB port, such as mobile phones / smartphones, tablets, powerbanks, etc.


Characteristics

Mechanisms in Technical Thermoplastic - resistant material, non-conductive.

Reference	21381 45381 S	21382 45382 S	21384 45384 S	45383 S	45387 S	45389 S	21398 45398 S
Rated voltage	100-240 V ~ 50-60 Hz						
Output voltage	5 V $\equiv$						5 V $\equiv$ / 9 V $\equiv$ / 12 V $\equiv$ / 15 V $\equiv$ / 20 V $\equiv$
Output power Maximum	21 W	21 W	15 W	7,5 W	12 W	10,5 W	30 W
Input Maximum current	400 mA		300 mA	200 mA	300 mA	250 mA	700 mA
Output current	A	2,4 A	-	3 A	1,5 A	-	2,1 A
	C	3 A	3 A 2,1 A / Plug	-	-	2,4 A	-
	A+C	2,1 A / Plug	-	-	-	-	-
Efficiency	> 80 %		> 80 %			78 %	> 80 %
Standby consumption	< 0,1 W		< 0,05 W	< 0,1 W	< 0,1 W	0,2 W	< 0,1 W
Output USB	A + C	C + C	A + A	A	C	A + A	C Power Delivery 30 W
Operation temperature	0 °C - +45 °C					-10 °C - +40 °C	0 °C - +45 °C


Dimensions MEC 21 (mm)

Ref. 21381

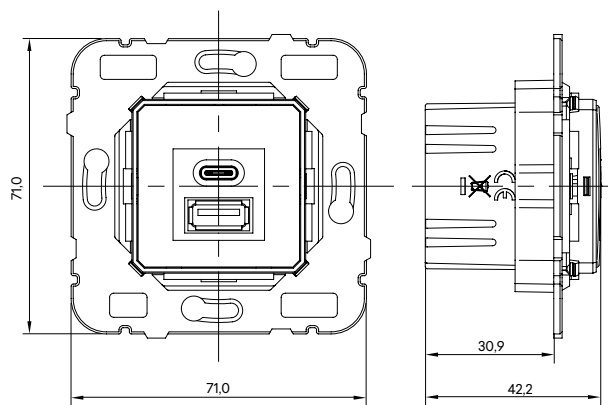

Dimensions MEC Q45 (mm)


Ref. 45381 S

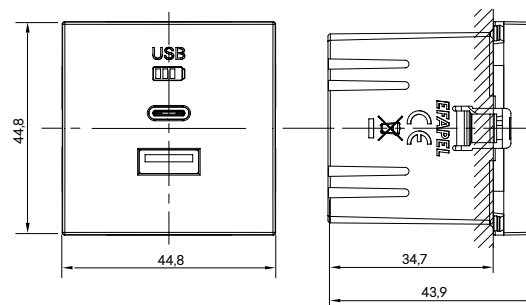


USB Chargers

Dimensions MEC 21 (mm)


Ref. 21382

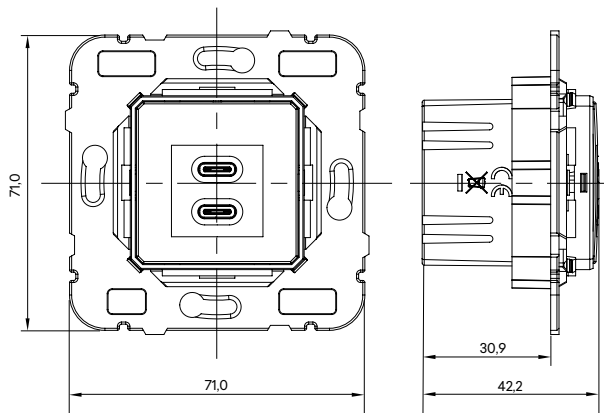

Ref. 21384

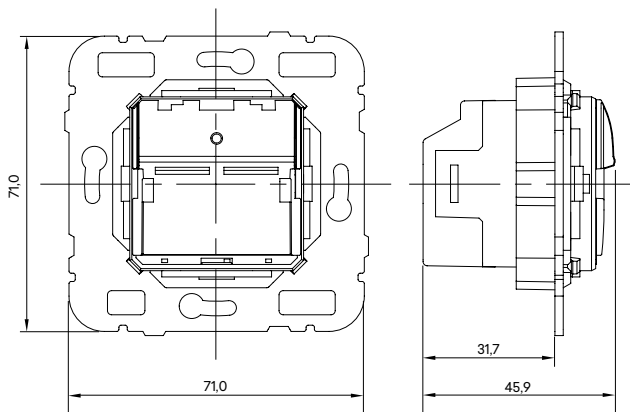


Ref. 21398

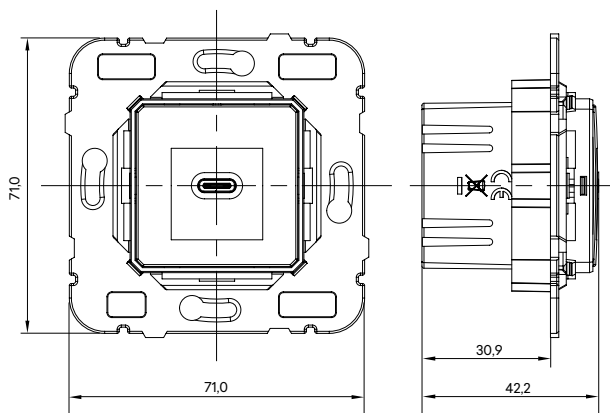


Dimensions MEC Q45 (mm)


Ref. 45382 S

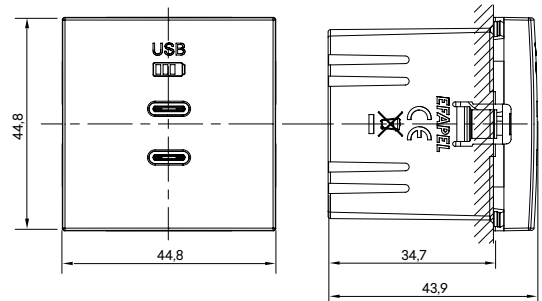

Ref. 45384 S

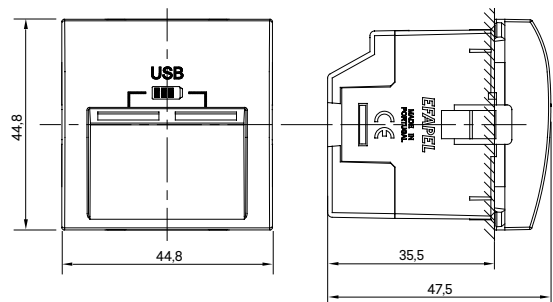


Ref. 45398 S

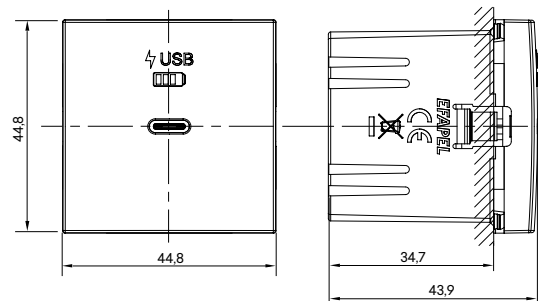


USB Chargers

Dimensions MEC Q45 (mm)


Ref. 45383 S

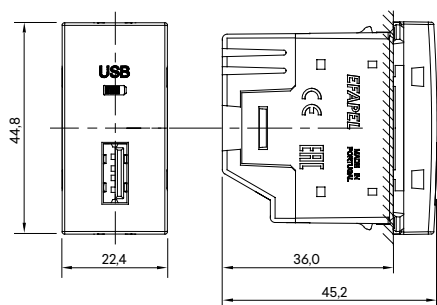

Ref. 45387 S

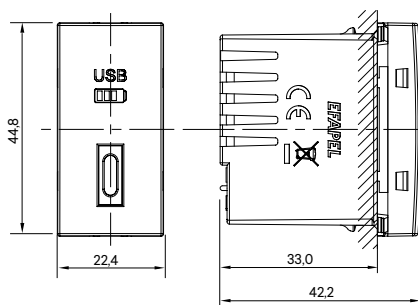


Ref. 45439 S




Wiring Diagrams


Ref. 21381 | 45381 S

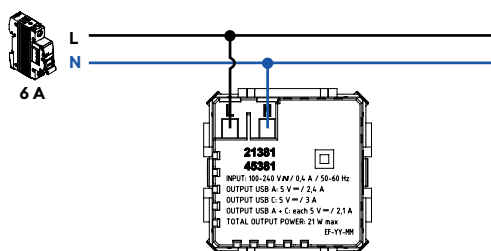




Ref. 21382 | 45382 S

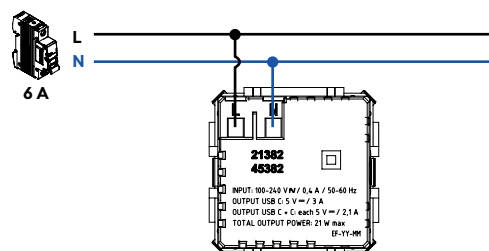


Ref. 21398 | 45398 S

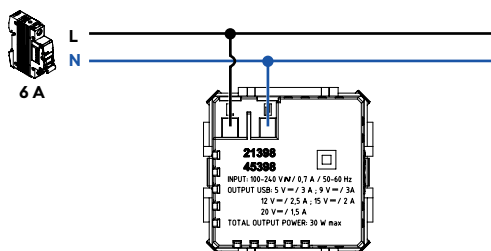



Ref. 45387 S

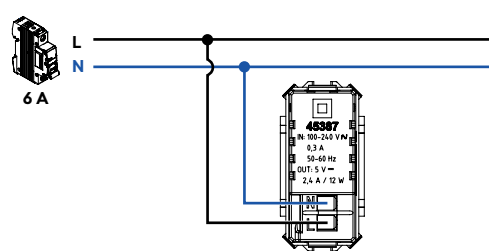


Ref. 21384 | 45384 S

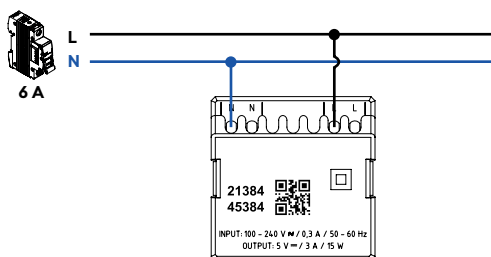

Ref. 45383 S

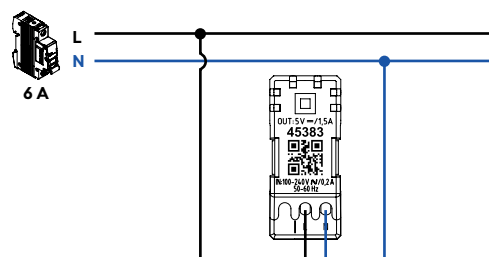

Ref. 45439 S

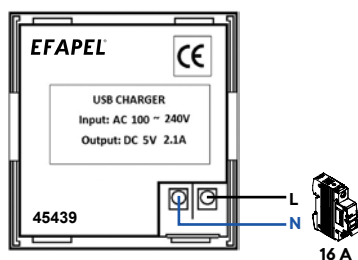

Screw connection terminals for the recommended wire connection 1.5 mm².