

Sockets for EV Charging

Description



Ref. 81132 - Flush Mounting Schuko Socket for EV Charging

Ref. 81112 - Flush Mounting French Socket for EV Charging

IP44

IK08

Characteristics

Mechanisms in Technical Thermoplastic - resistant material, non-conductive.

Energy Sockets (Schuko and French):

Nominal characteristics: **16 A / 250 V ~**

Screw Connection

Protection Index: **IP44 / IK08**

In accordance with IEC 60884-1; IEC 62196-1; IEC 61851-1 Standards


Socket for charging electric vehicles in mode 1 or mode 2

Reinforced socket: **tested with load cycles of 8h at 230 V ~ 16 A**


Socket supports currents up to **16 A**, the charging current is limited by the EV and by each country's regulations (8 A to 16 A)

Charging Mode


MODE 1




MODE 2



Dimensions (mm)

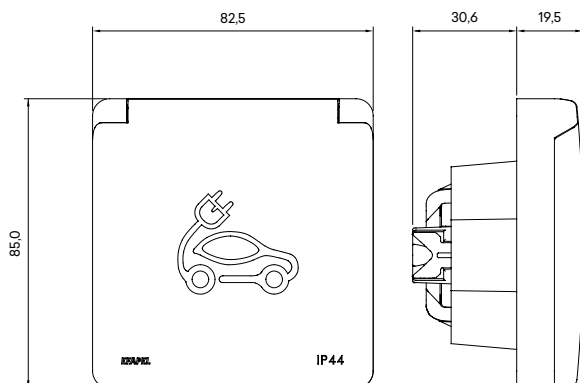

Wiring Diagram

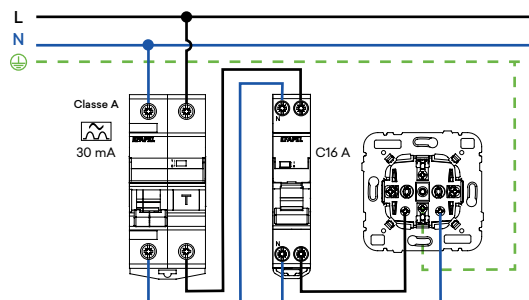

Installation of only one socket for each dedicated circuit