


Fast Connectors 2P+T

Description

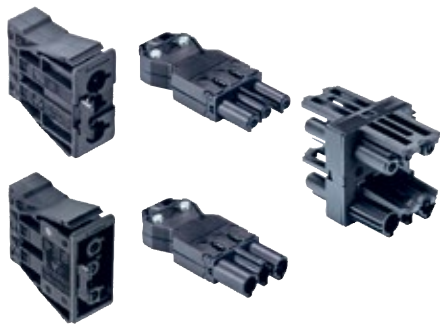

Ref. 83150 | 83151 | 83152 | 83153 | 83154

Fast Connectors 2P+T to supply the Desktop Workstations.

To be used with Modules in **Ref. 45980 SBR** and **Ref. 45981 SBR**.

Available in colors **PT** - Black, **VM** - Red.

Technical Characteristics

Reference	83150 PT	83150 VM	83151 PT	83151 VM	83152 PT	83152 VM	83153 PT	83153 VM	83154 PT	83154 VM
Rated Current	20 A									
Rated voltage	250 V ~									
Color	Black	Red	Black	Red	Black	Red	Black	Red	Black	Red
Pole marking	L, N, PE									
Rigid section (Min. / Max.)	0,75 mm² / 2,5 mm²				0,5 mm² / 2,5 mm²				-	-
Flexible section (Min. / Max.)	0,75 mm² / 2,5 mm²				0,5 mm² / 1,5 mm²				-	-
Cable diameter (Min. / Max.)	6,5 mm / 10,5 mm				-				-	-
Number of terminals per pole	2								-	-
Connector type	Male	Male	Female	Female	Male	Male	Female	Female	-	-
Connection type	Screw				Screwless				-	-
Connection angle	Flat								-	-
Connection fixation	Snap-on									
Inputs number	1									
Outputs number	1								3	
Distribution type	-								H	

Dimensions (mm)

