

Card-system Timer Switch

Description



MEC 21 Mechanism

Ref. 21033

Finishings - LOGUS 90 | APOLO 5000 | SIRIUS 70

MEC Q45 Mechanism

Ref. 45033 S

Finishings - QUADRA | SIZA | LATINA

Compatible with any type of bank card (ATM).
Possibility of inserting a card in the Vertical or Horizontal position.
Orienting Light function - whenever a card is inserted, the mechanism remains backlit.




Characteristics

Rated voltage: **100-240 V ~ | 50-60 Hz**
Maximum load: **16 A (cos ϕ = 1)**
Operating time regulation: **0 seconds to 60 seconds**
Consumption: **< 250 mW**
Operation temperature: **-10 °C to +45 °C**
Compatible with any load type:
- Output: **NO or NC**;
- Voltage free output contact


Operation

Allows control of a circuit according to the presence of a card in the holder.
When removing the card from the mechanism, the load remains On / Off for the pre-defined period of time.

Dimensions MEC 21 (mm)

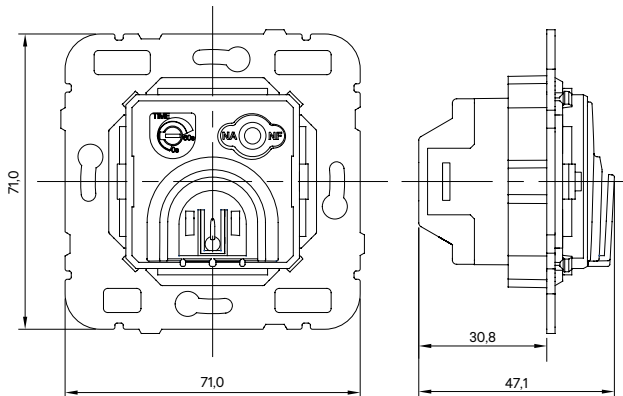

Dimensions MEC Q45 (mm)

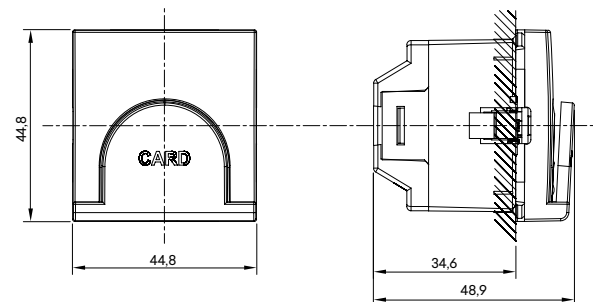

Wiring Diagram

