

Staircase Time-Delay Switch 10 A

Description



Ref. 55510 SPA

Enables the connection / disconnection of a lighting circuit, according to a programmed time-delay.

The activation is made by the use of Push-buttons, Rocker Push-buttons or Rocker Push-buttons with Orienting Light.

Installation in DIN rail track, in Panelboards.


Characteristics

230 V ~ | 50/60 Hz
Breaking capacity: 10 A
Temporisation: 45 seconds to 7 minutes
Dimension: 1 Module DIN
Operation temperature: -10 °C to 60 °C
Protection Index: IP20
Maximum leakage current: 50 mA


Operation

By pressing the button, the load stays on as long as the time programmed time.

Dimensions (mm)

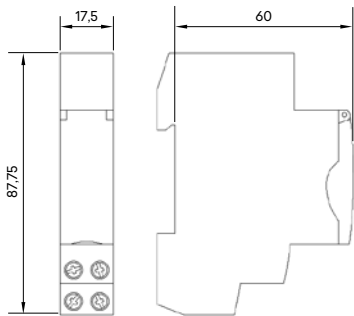


Maximum Recommended Load

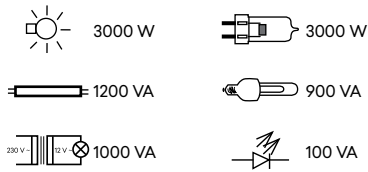

Wiring Diagrams

With 3 wires

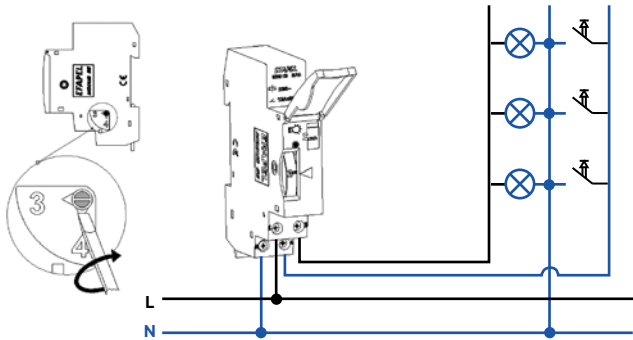

With 4 wires

