

Electronic Staircase Time-Delay Switch 16 A

Description



Ref. 55030

Enables the connection / disconnection of a lighting circuit, according to a programmed time-delay.


The activation is made by the use of Push-buttons, Rocker Push-buttons or Rocker Push-buttons with Orienting Light according to the 3 wires diagram.

Installation in DIN rail track, in Panelboards.


Characteristics

Rated voltage: **230 V ~**
 Consumption: **48 mA**
 Frequency: **50/60 Hz**
 Operating time regulation: **10 seconds - 10 minutes**
 Output: **1 NO - 16 A/250 V ~ 4000 VA**
 Cables section: **0,2 - 2,5 mm²**
 Protection Index: **IP20**
 Insulation Class: **II**


Operation

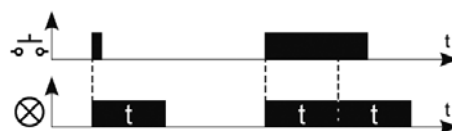


Dimensions (mm)

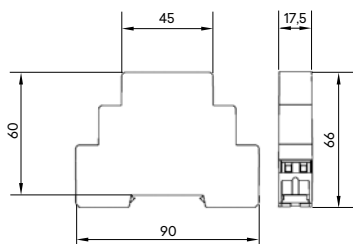

Maximum Recommended Load

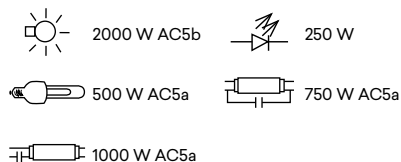

Electrical Diagram



Wiring Diagrams

With 3 wires

With 4 wires

