

1 Channel Analogue Daily Time Switch

Description



Ref. 55501 ANL

Enables to control the operation of an electric installation or an equipment according to a daily program.


The minimum time of a program is 15 minutes.

Installation in DIN rail track, in Panelboards.


Characteristics

Rated voltage: **230 V ~**
Frequency: **50/60 Hz**
Breaking capacity: **16(4) A**
Battery back-up time: **NiMH - V80 H**
Precision: **1 second / day**
Programming time: **24 hours / 15 minutes**
Consumption: **0,5 W**
Operation temperature: **-10 °C to +45 °C**
Protection Index: **IP20**
Insulation Class: **II**
Battery Backup: **150 hours after feeding for 120 hours**


Dimensions (mm)

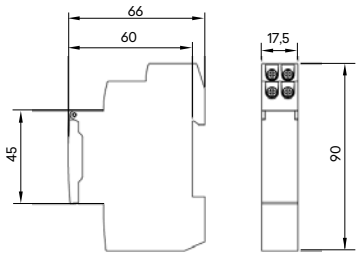




Maximum Recommended Load

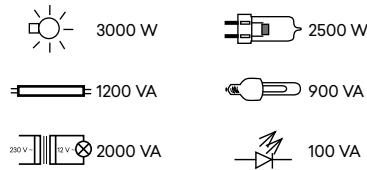


Electrical Diagram



Wiring Diagram

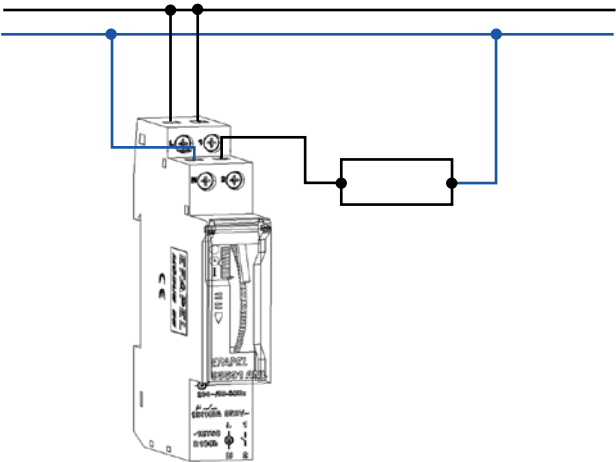

Battery Replacement

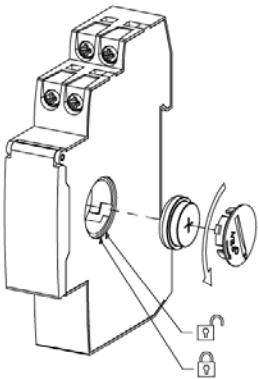

ATTENTION: This unit incorporates a battery containing itens that can be harmful to the environment. Please do not throw it away without removing the battery and putting in the proper container for recycled batteries.