

Digital Time Switches

Description



Ref. 55537 | 55039


Enables to control an installation or equipment according to a daily and/or weekly programming.

Installation in DIN rail track, in Panelboards.


Characteristics

Rated voltage: 230 V ~
Frequency: 50/60 Hz
1 Circuit: 1 NO + 1 NC
2 Circuits: 2 NO + 2 NC
Memory spaces: 400
Programming mode: daily/weekly
Operation mode: manual, automatic, random, pulse
Time change summer/winter: automatic, manual
Operation temperature: -20 °C to +60 °C
Cables section: 0,2 - 2,5 mm²
Protection Index: IP20
Insulation Class: II
Clock maintenance time: 3 Years
Programming maintenance time: 10 Years


Dimensions (mm)

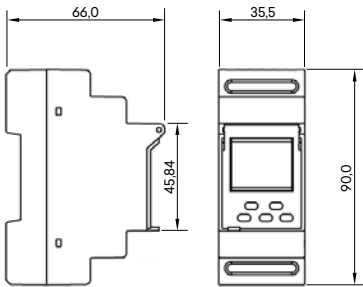


Maximum Recommended Load

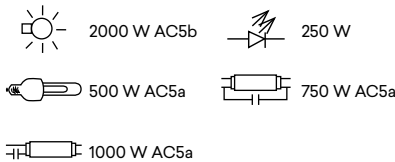

Electrical Diagram

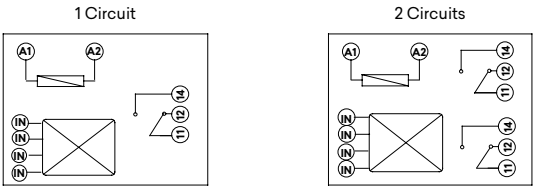

Wiring Diagrams

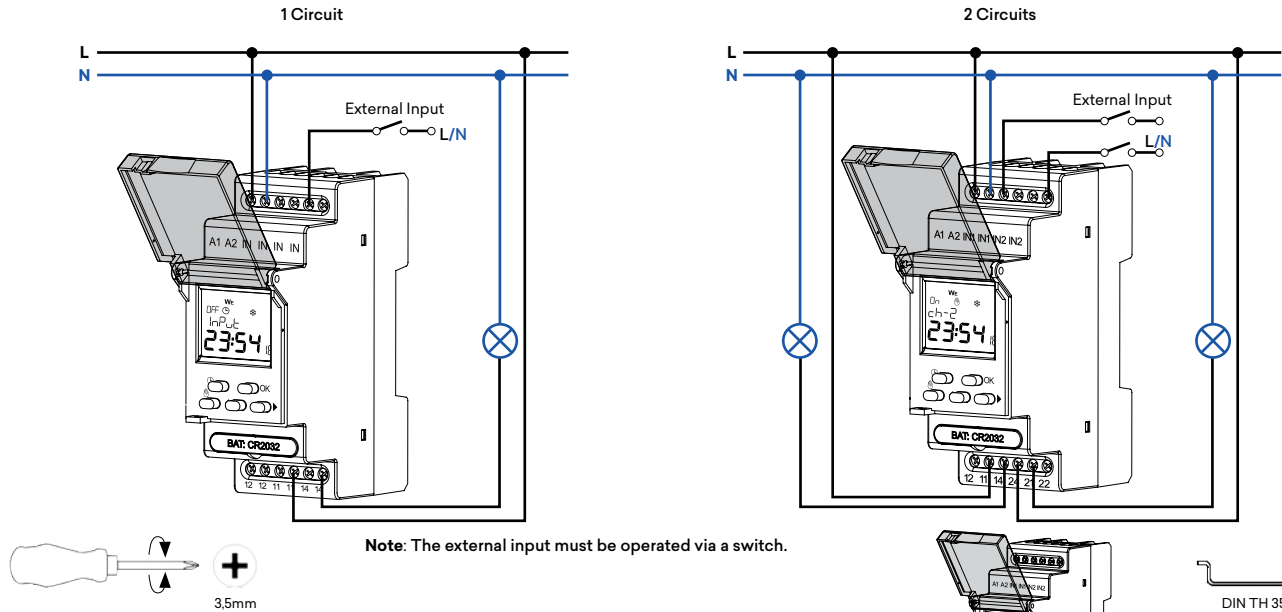

ATTENTION: This unit incorporates a battery containing items that can be harmful to the environment. Please do not throw it away without removing the battery and putting in the proper container for recycled batteries.

