

Switches

Description



Single Mechanism for Flush Mounting Devices
Finishings - LOGUS 90 | APOLO 5000 | SIRIUS 70

The IP44 Kit for mechanisms of **single rocker (Ref. 21981)** and **double rockers (Ref. 21982)** assures the **Protection Degree IP44** to the mechanisms of the MEC 21 Series.

Characteristics


Mechanisms in Technical Thermoplastic - resistant material, non-conductive.

Control Devices
10 A - 250 V~
Connection by screws or screwless terminals. It allows the usage of rigid and flexible cable.
In accordance with IEC/EN 60669-1 Standard, tested according to 19.3:


Relationship between rated current of the switch and rated power of the SBL circuit	
Rated current of the switch, In [A]	Rated power of the SBL circuit [W]
$I_n \leq 10$	100
$10 < I_n \leq 13$	150
$13 < I_n \leq 16$	200
$16 < I_n \leq 20$	250

SBL - Self Ballasted Lamp (CFL or LED)

Dimensions (mm)

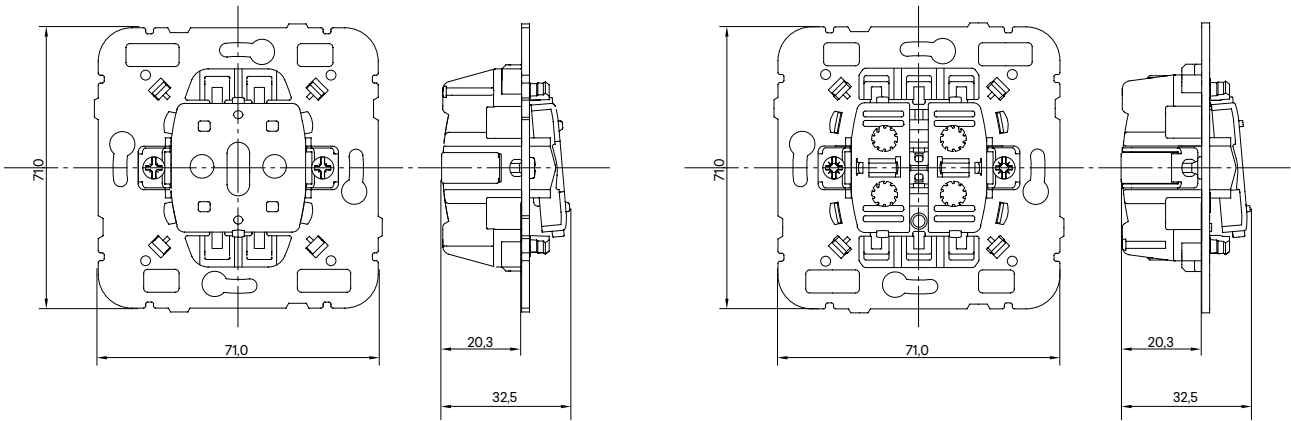

Mounting

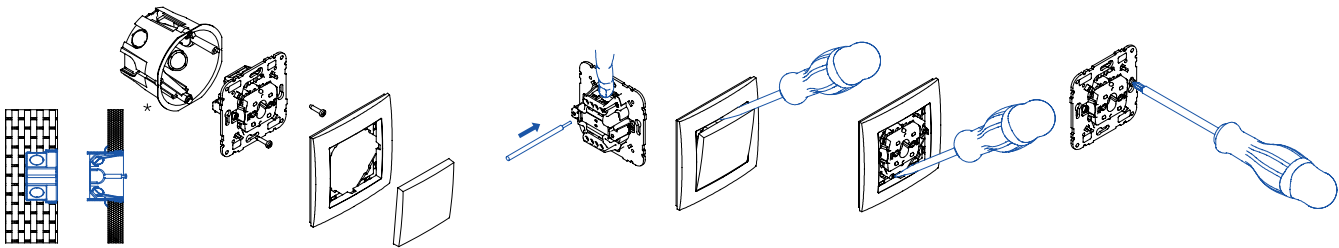

*Type I1