

Switches

Description



MEC Q45 Mechanisms
Finishings - **QUADRA** | **SIZA** | **LATINA**

Possibility of installation:

Flush mounting (Installation in Flush Mounting Boxes);
Surface mounting (Installation in Surface Mounting Boxes);

Cable trunkings:
Mini Cable Trunkings (Add of the Surface Mounting Box with adptation to the Cable Trunking);
Distribution Cable Trunkings (Add of the **MEC Q45** Modular Adapter).

Available in colors **BR** - White (RAL 9003), **BM** - Matte White, **AL** - Aluminium, **PM** - Matte Black.

Characteristics

Mechanisms in Technical Thermoplastic - resistant material, non-conductive.

Control Devices


10 A - 250 V~

Connection by screws or screwless terminals. It allows the usage of rigid and flexible cable.
In accordance with IEC/EN 60669-1 Standard, tested according to 19.3:


Relationship between rated current of the switch and rated power of the SBL circuit	
Rated current of the switch, In [A]	Rated power of the SBL circuit [W]
$I_n \leq 10$	100
$10 < I_n \leq 13$	150
$13 < I_n \leq 16$	200
$16 < I_n \leq 20$	250

SBL - Self Ballasted Lamp (CFL or LED)

Dimensions (mm)

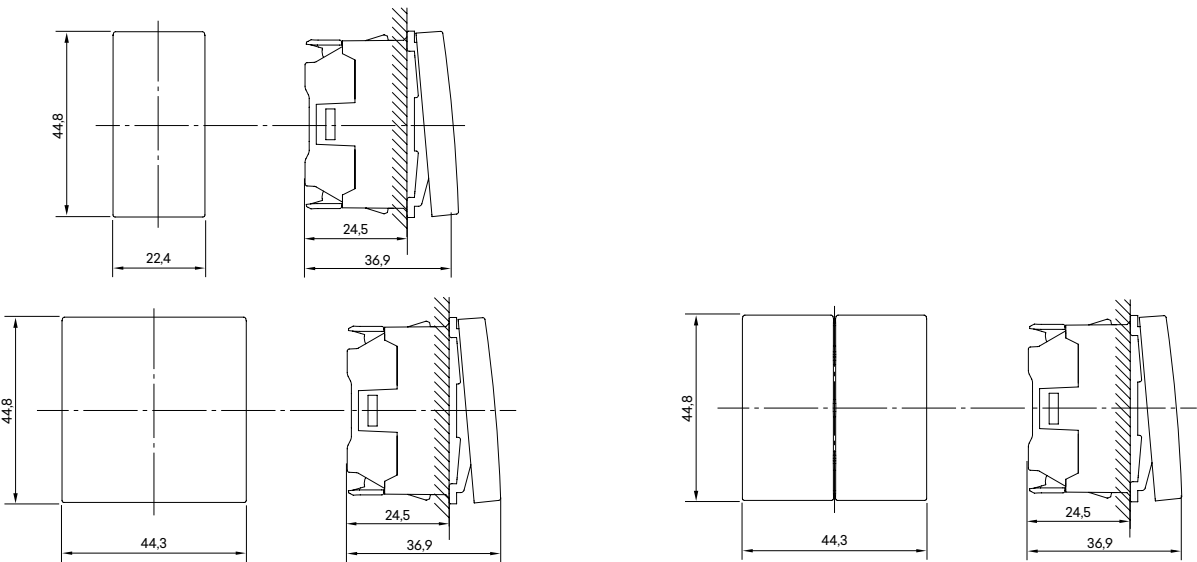

Mounting

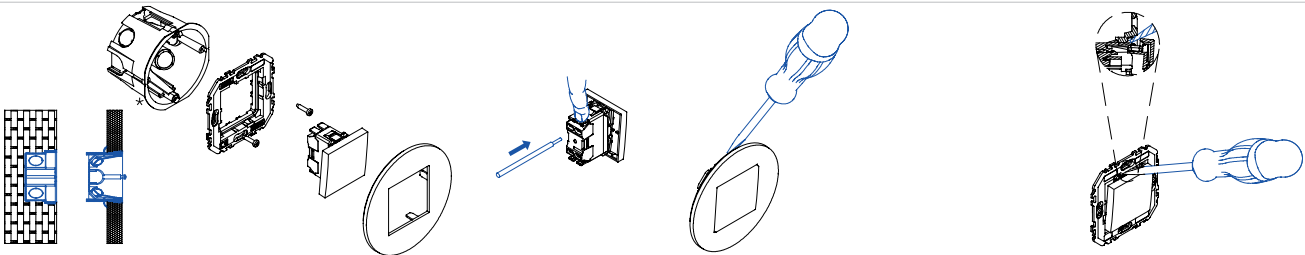

*Type II