

USB Data | VGA | RCA Sockets

Description



MEC Q45 Mechanisms
Ref. 45437 S - USB Data Socket - 1 Module
Data pass-through socket via USB connection
Ref. 45430 S - Female HD15 Socket - 2 Modules
Video pass-through socket between any transmitter (computer, DVD, ...) and a terminal (TV, LCD, Video projector, ...)
Ref. 45580 S - Female RCA Socket 3 Outputs - 1 Module
Video pass-through socket between any transmitter (computer, DVD, ...) and a terminal (TV, LCD, Video projector, ...)
Finishings - **QUADRA | SIZA | LATINA**

Available in colors, with the adapter for LOGUS 90, APOLO 5000 and SIRIUS 70


Characteristics

Mechanisms in Technical Thermoplastic - resistant material, non-conductive.


Reference	45437 S	45430 S	45580 S
Connection	Screw		
Distance between sockets	5 meters	15 meters	20 meters
Maximum speed	12 Mbit/s	not apply	

Dimensions (mm)


Ref. 45437 S

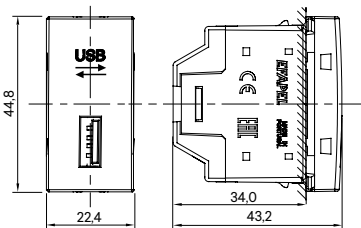


Ref. 45430 S

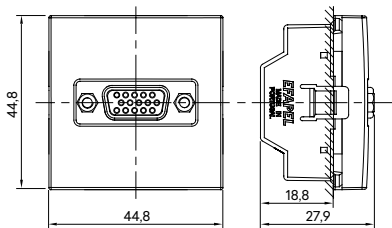


Ref. 45580 S




Wiring Diagrams



Pino	
+	VBUS 5VDC
-	GROUND
D+	DATA +
D-	DATA -



Pino	
1	RED COAX
2	GREEN COAX
3	BLUE COAX
4	ORANGE (ID BIT 2 - NC)
5	RED (GND)
6	RED BRAID
7	GREEN BRAID
8	BLUE BRAID
9	WHITE (KEY)
10	BLUE (GND)
11	BROWN (ID BIT 0 - GND)
12	YELLOW (ID BIT 1 - SDA)
13	GREY (HORIZONTAL SYNCHRONIZATION)
14	GREEN (GreenICAL SYNCHRONIZATION)
15	BLACK (ID BIT 3 - SCL)
16	SHIELD (GROUND)



Pino	
V	VIDEO Câble
R	RIGHT AUDIO SIGNALS
L	LEFT AUDIO SIGNALS
GND	GROUND