



Telecommunication Panelboard (Flush Mounting Low Depth) - beta

Dimensions (mm)

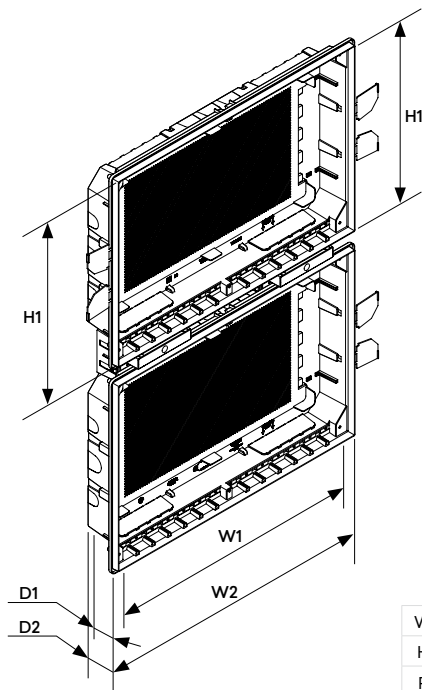


W1 (mm)	530
H1 (mm)	313
P1 (mm)	66
W2 (mm)	552
P2 (mm)	75

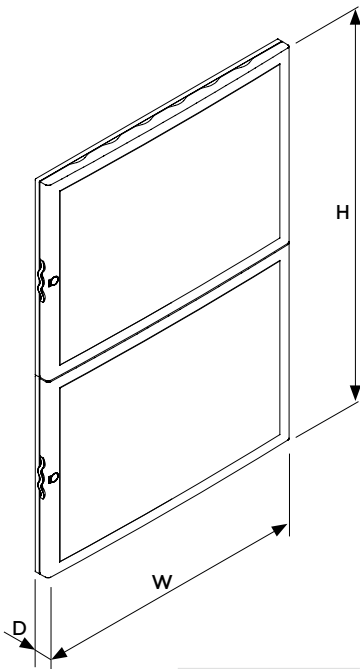


W (mm)	H (mm)	D (mm)
572	801	35

Recessed Assembly

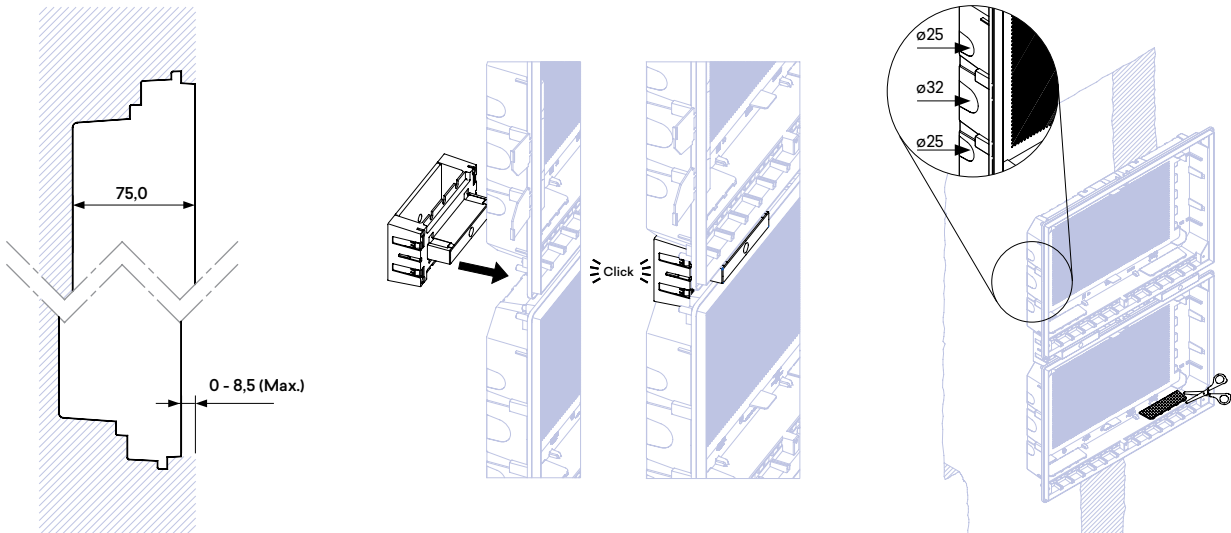

Telecommunication Panelboard (Flush Mounting Low Depth) - beta

On Hollow Walls

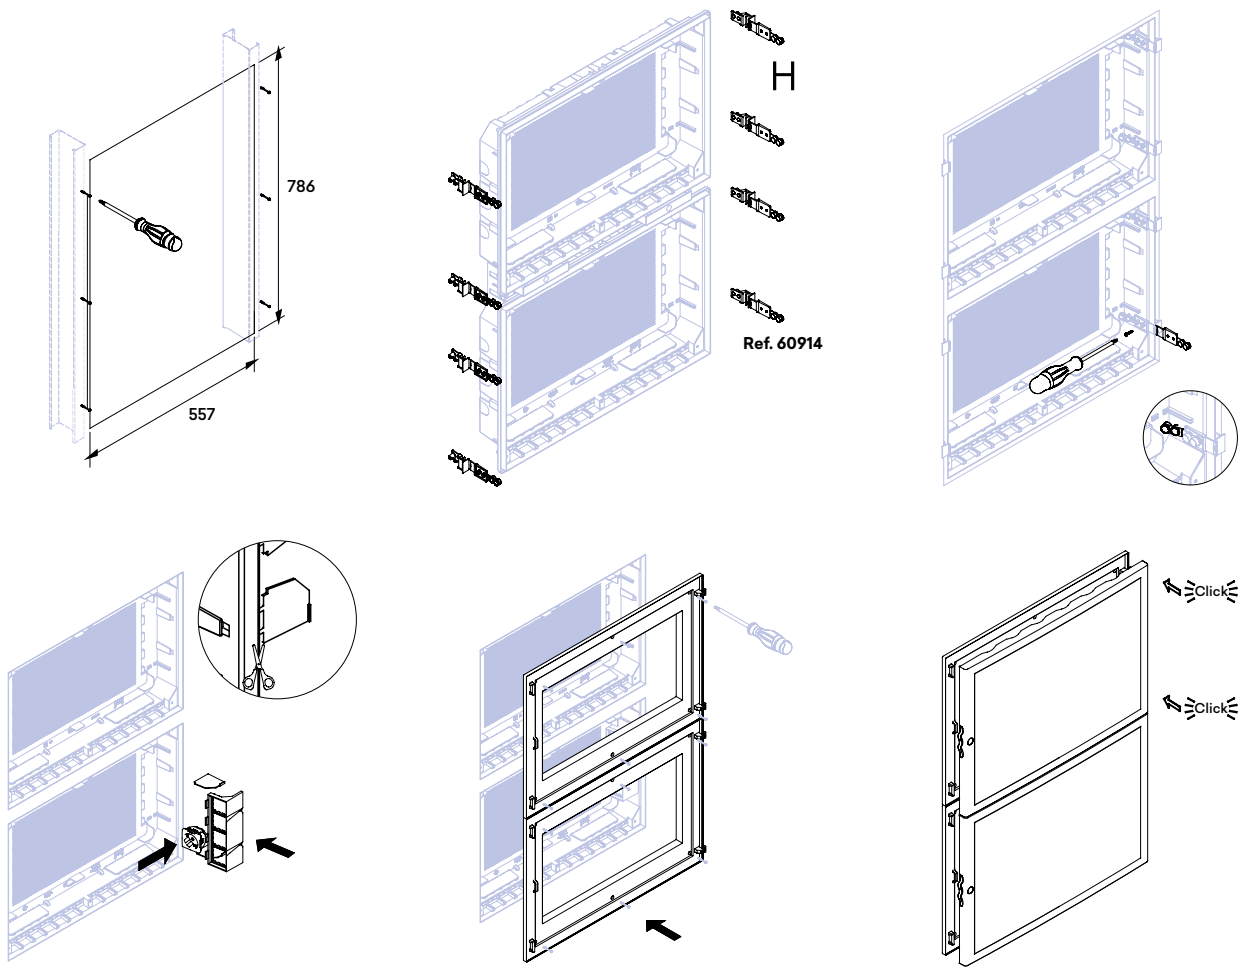

Classification - EN 60670 Standard

Section 7	Classification	Telecommunication Panelboard
7.1	Nature of the material	Insulating
7.2	Installation type	Recessed Assembly
		Intended to be installed on hollow walls H
7.5	Installation temperatures	-5 °C up to +60 °C
7.7	Degrees of Protection	IP20 in accordance with IEC 60529
7.8	Means for fixing the devices to the boxes	Boxes granted to receive screws