

DESCRIPTION



- MEC 21 Mechanisms:
 - Finishings - LOGUS⁹⁰ | APOLO 5000 | **sirius70**.
- Semi-assembled devices - **QUADRO 45**:
 - Finishings - **QUADRO 45** | **QUADRO 45** - *Siza Vieira*.
- Controls the connection of electrical circuits according to the detection of motion and surrounding luminosity.
- Compatible with any electrical load.
- Wall mounting.

OPERATION


- Remove the cover of the mechanism to reach the adjustment potentiometers.
- Proceed to make the necessary adjustments.

Operating Time Regulation

Sensibility Regulation



Range of Detection and Detection Angle

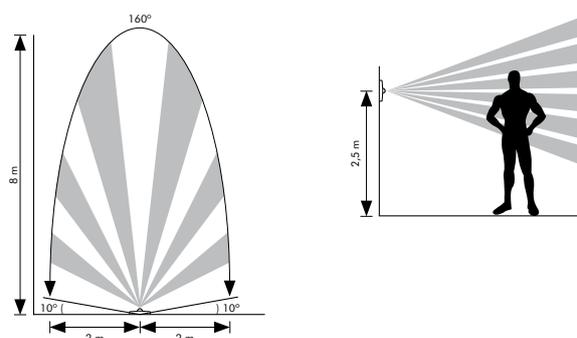

CHARACTERISTICS

- 230V~ - 50Hz.
- Ref. 21401: 1000W.
- Ref. 21402: 400W.
- It needs a neutral conductor.
- Consumption: < 1W.
- Sensitivity regulation.
- Operating time regulation: 5 sec. to 5 min.
- Range of detection: 8 meters.
- Maximum height: 2,5 meters.
- Detection angle: 160°.
- Outputs: NO+NC.
- Inverter contact (NO+NC), voltage free

WIRING DIAGRAM

